Contacts

www.dropsa.com
sales@dropsa.com

ITALY
Dropsa SpA
t. +39 02-250791
f.+39 02-25079767

U.K.
Dropsa (UK) Ltd
t. +44 (0)1784-431177
f. +44 (0)1784-438598

GERMANY
Dropsa GmbH
t. +49 (0)211-394-011
f. +49 (0)211-394-013

FRANCE
Dropsa Ame
t. +33 (0)1-3993-0033
f. +33 (0)1-3986-2636

CHINA
Dropsa Lubrication Systems (Shanghai) Co.,Ltd
t. +86 (021) 67740275
f. +86 (021) 67740205

U.S.A.
Dropsa Corporation
t. +1 586-566-1540
f. +1 586-566-1541

AUSTRALIA
Dropsa Australia Ltd.
t. +61 (0)2-9938-600644
f. +61 (0)2-9938-6611

BRAZIL
Dropsa do Brazil
t. +55 (0)11-563-10007
f. +55 (0)11-563-19408

Light Alloy Junctions

This junction are produced from extruded from light alloy sections and have two fixing holes.
All holes are interconnected and threaded 5/16” – 24 NF with a 54° seating to suit compression cone **Part No. 93004** and bushing **Part No. 92009** (hex.8) or **92004** (hex.9).
Suitable only for 4 mm (5/32”) tubing.
Junction meter units type D21 and DDJ may be screwed directly in the junction.
Junction of different length and fixing centres can be supplied to special order.

Part No. 30001
(3 way)



Part No. 42133
(3 way)



Part No. 42135
(3 way)



Part No. 42137
(3 way)



Part No. 40001
(4 way)



Part No. 42134
(2 way)



Part No. 42136
(4 way)



Part No. 42142
(5 way)



Part No. 42426 8 way double row junction

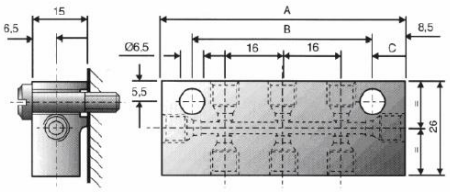

OUTLETS	A (mm)	B (mm)	C (mm)	WEIGHT (Kg)	PART No
6	50,3	33,3	8,65	0,038	**42425**
8	66,2	49,2	8,60	0,050	**42426**
10	82	65	8,50	0,062	**42427**
14	116	99	9,5	0,090	**42428**

Part No. 42126 5 way double row junction

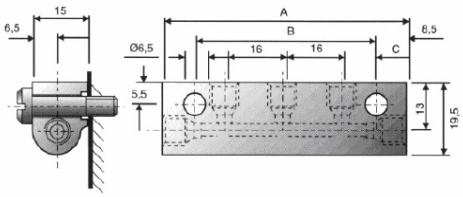

OUTLETS	A (mm)	B (mm)	C (mm)	WEIGHT (Kg)	PART No
4	50,3	33,3	8,65	0,038	**42125**
5	66,2	49,2	8,60	0,050	**42126**
6	82	65	8,50	0,062	**42127**
7	98	81	8,50	0,054	**42128**
8	113,8	96,8	8,40	0,064	**42129**
10	149	132	10	0,085	**42130**
12	177,2	160,2	8,10	0,098	**42131**