

AI-P

Single piston pump



CHARACTERISTICS

Pump pressure:

- 145 bar

Displacement:

- 3 cm³/stroke

Filling quantity:

- 0.8 kg

Drive method:

- pneumatic

IDEAL FOR

- Fluid Grease or Grease

- Use with progressive dividers

- Lubrication cycles from 1x/min to 1x/day

APPLICATIONS

- General industry

- Use in progressive systems

- Single point lubrication with grease

AI-P single piston pump

The single piston pump AB-P is a robust pneumatic pump. It is suitable for automated lubrication, from several times daily to once per minute.

TECHNICAL INFORMATION

General

Type	Single piston pump
Tank	0,8L
Lubrication line connection	Pipe connection Ø 8 mm
Ambient temperature	From 32 to 104 °F (from 0 to 40 °C)
Filling	Filling device
Protection class as per EN60529	IP 54

Hydraulic system

Operating pressure	145 bar
Displacement	3 cm ³ /stroke
Operating medium	Fluid grease, grease
Range of viscosity	NLGI 000 – 2*


* as per fluid grease release list

Drive

Type of drive	pneumatic
Air Supply pressure	4-6 bar
Air Supply fitting	G ¼"


Sensor system

Level control	Ind. Switch	Mech. Switch
Nominal voltage	24 V DC	Max 30VDC Max 250VAC
Power consumption	≤ 20 mA	-
Switching current	≤ 200 mA	Max. 3A
Connection	M12 x 1	DIN 63450

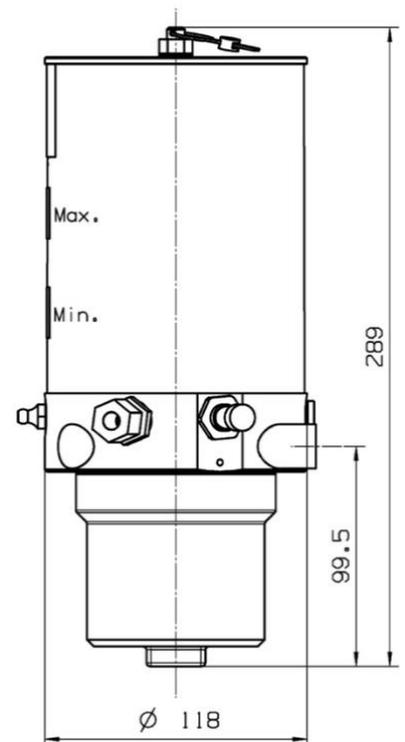

AI-P

Single piston pump

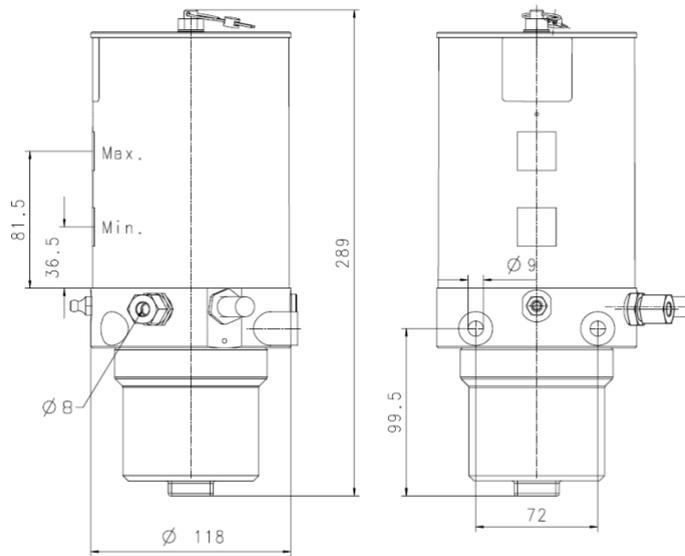

Order Information:

Order Number	Outlet	Level Switch	Other
P30011402	Ø8mm	Mech. Switch, DIN 43650 Connection	Incl. Female Connector
P30011403	Ø8mm	Mech. Switch, DIN 43650 Connection	Without Female Connector
P30011406	Ø8mm	Inductive proximity switch, M12x1 connection	

Electrical Connection:

Version mech. Switch DIN 43650	Version Inductive Switch M12x1
1 – max. 30VDC / 250VAC 2 - NC 3 - NO	1 – 10..30VDC 2 – n.c. 3 – Ground / Masse 4 - NO

CB2341PE WK 44/20

Dropsa BM Germany GmbH products can be purchased at Dropsa BM Germany GmbH branches and authorised distributors. Write to Info.bm@dropsa.com

Distributor Info: